

(12) PETTY PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200027816 B3
(10) Patent No. 721721

(54) Title
Table or counter mat

(51)⁷ International Patent Classification(s)
A47G 023/03 B32B 033/00

(21) Application No: 200027816

(22) Application Date: 2000.04.17

(43) Publication Date : 2000.06.15

(43) Publication Journal Date : 2000.06.15

(45) Granted Journal Date : 2000.07.13

(62) Divisional of:
199958407

(71) Applicant(s)
Jayfield Pty Ltd

(72) Inventor(s)
Stephen Robert Carkeek

(74) Agent/Attorney
PATENT ATTORNEY SERVICES, 26 Ellingworth Parade, BOX HILL VIC 3128

(56) Related Art
JP 10-211078
JP 10-085114
GB 2229083

ABSTRACT

A table or counter mat having a composite sheet structure comprising a non-slip backing layer 3; a top liquid absorbent textile surface 1 for resting cups, mugs or glasses; and an intermediate stabilisation layer 2 joining the backing layer 3 to the textile surface 1 wherein the resultant mat is absorbent and readily able to be laundered. The invention also provides a method of forming the table or counter mat by curing and bonding of the nitrile rubber backing layer 3 to the intermediate layer 2 and upper polyester textile layer 1 at greater than 100°C and preferably greater than 170°C and a sublimation printing 4 for printing on the textile layer 1 occurs at greater than 100°C and preferably greater than 170°C such that the mat is able to be laundered in hot water.

AUSTRALIA

Patents Act 1990

COMPLETE SPECIFICATION

FOR A PETTY PATENT

ORIGINAL

Applicant: JAYFIELD PTY LTD

Actual Inventor: Stephen Robert Carkeek

Address for Service: **PATENT ATTORNEY SERVICES**
26 Ellingworth Parade
Box Hill Victoria 3128
Australia

Title: TABLE OR COUNTER MAT

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

TABLE OR COUNTER MAT

Technical Field

This invention relates to a table or counter mat that lies flat and is readily laundered. The invention is particularly related to a device to protect and provide a functional non-slip absorbent and message communication covering for hospitality bar tops although the invention is not limited to such use.

Background Art

The product used by the hospitality industry, including hotels, clubs and restaurants for absorbing spilt liquids on bar tops is generally in the form of strips of cotton towelling.

10 Problems experienced by hotel operators with the towelling product is that it slips on the work surface. It also wrinkles, bunches up in an unsightly appearance and it presents an unstable surface where glasses may topple over, spilling the contents. Towelling tends to lose colour and shrink in the washing process, further detracting from its appearance and presentation of the bar.

15 In addition, when the towelling product carries a printed brand message, there is a loss of colour, shrinkage and creasing which greatly detracts from the brand image and diminishes the investment value for the brand owner.

It is also known to have floor mats which may have a rubber backing and a top tufted pile of some 2 or more centimetres or alternatively a plurality of upwardly extending rubber
20 fingers. However, such articles are used as floor mats with the upper layer having a physical mode of operation of brushing dirt or mud or the like from soles of shoes and allowing the residue dirt to fall within the spaces between the fingers or tufts of carpet. In essence such a

structure is like a form of an upturned brush and is not liquid absorbent or providing a stable surface. Such an article is therefore not practical or useable as table or counter mats.

DISCLOSURE OF INVENTION

It is an object of the invention to provide a table or counter mat that overcomes one or
5 more of the disadvantages of the prior art.

In accordance with the invention there is provided a table or counter mat having a composite sheet structure comprising a non-slip backing layer; a top liquid absorbent textile surface for resting cups mugs or glasses; and an intermediate stabilisation layer joining the backing layer to the textile surface wherein the resultant mat is absorbent and readily able to
10 be laundered. The non-slip backing layer can be formed from rubber such as a nitrile rubber of less than 2 mm thick with a density of about 1000 grams per square metre. The intermediate stabilisation layer can comprise a heat curable material non-woven polyester curable at temperatures greater than 100°C and preferably at about 170°C and wherein the mat is able to be laundered in hot water.

15 The textile surface of the table or counter mat can include a textile marking providing a print or advertising message viewable from above. This can be formed by a sublimation textile printing process as will be further detailed hereinafter. Preferably the sublimation printing occurs at greater than 100°C and preferably greater than 170°C such that the mat is able to be laundered in hot water.

20 The top liquid absorbent textile surface can be formed from a polyester surface with a pile height substantially in the range of 3 to 7 millimetres. Another embodiment has the top

substantially in the range of 5 to 10 millimetres. However this textile surface receives its colour marking by an acid dye process.

The invention also provides a method of forming a table or counter mat including the steps of forming a nitrile rubber sheet material as a backing layer; forming an intermediate
5 layer of non-woven polyester fabric; forming a textile surface layer to form an upper layer; aligning all three layers and compressing the layed up materials by a heated platen for a selected time duration, pressure and temperature settings to cure and bond the nitrile rubber backing to the intermediate layer and upper textile layer; wherein the resultant table or counter mat lays flat and is able to stably support a glass or other similar liquid vessel with
10 the table or counter mat liquid absorbent to absorb any spilled liquid.

The step of the curing and bonding of the nitrile rubber backing to the intermediate layer and upper textile layer occurs preferably at greater than 100°C and preferably greater than 170°C such that the mat is able to be laundered in hot water.

The step of providing a sublimation printing process can be by using a screen printed
15 or digital image print paper which carries the required design and placing on the upper textile layer surface of the bar runner blank with print face down and activating a heat platen to press the screen print or digital image print paper to the textile surface under a selected heat, pressure and time duration. Preferably both the curing and bonding of the nitrile rubber backing to the intermediate layer and upper textile layer occurs at greater than 100°C and
20 preferably greater than 170°C and the sublimation printing occurs at greater than 100°C and preferably greater than 170°C sch that the mat is able to be laundered in hot water.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the invention is more readily understood, a particular embodiment thereof will now be described by way of example only with reference to the accompanying drawings wherein:

5 Figure 1 is a perspective view of a table or counter mat according to a first embodiment of the invention.

Figure 2 is a diagrammatic exploded constructional view of the table or counter mat of Figure 1.

BEST MODE FOR CARRYING OUT THE INVENTION

10 Referring to Figure 1, it can be seen that the table or counter mat of the invention can be a non-slip, loose lay bar runner comprising a rectangular strip of nitrile rubber backing, heat cured and moulded to a tufted cut pile textile fabric dyed to a plain colour or a printed design.

Referring to Figure 2, it can be seen that the invention comprises three construction 15 layers which are heat pressed and moulded together to form a homogeneous product for dimensional stability and to withstand a frequent laundry process.

The top layer 1 is a textile surface which in one embodiment is a tufted synthetic yarn cut pile surface with a pile height of 6 mm, and pile weight of 620 grams per square meter, cut to a size blank required, generally 250 x 900 mm, but not limited to this size.

20 The intermediate layer 2 is a spun bonded polyester non-woven primary fabric layer 110 grams per square meter, providing added stability and pile carrier.

The backing layer 3 is a nitrile rubber compound tufted to the intermediate layer 2.

The textile surface 1 can be marked such as by sublimation printing so as to provide a message or logo viewable from the top surface 4 of the textile surface 1. Cut pile surface dyed to plain colours as required, or printed designs by heat transfer textile primary process.

Raw Material Contents

5 Looking at the composition in more detail the backing layer comprises F2224 - nitrile rubber compound applied as the product back support with a 1 mm thickness of density 1000 grams per square metre. It is composed of mineral filler with carbon black reinforcing. Zinc oxide and stearic acid activation together with ester plasticisation are used as understood in the field. Phenolic derived antidegradants are used. Also organic accelerators in combination
10 with sulphur allow for conventional curing. Miscellaneous additives including resins and activators can be included.

The nitrile rubber backing provides a non slip surface. The thickness of the backing aids the stability while still allowing ready laundering.

The primary supporting intermediate layer comprises 100% Polyester thermally
15 bonded non-woven fabric with a weight density of 110 gram per m² and tensile strength of 190 Newtons per 5 cm providing maximum elongation of +30% and tear strength of 140N. Particular advantageous characteristics are dimensionally stable, high thermal stability, reduced flammability and ensures the product always lays flat

With the top textile surface there is a choice of:

20 a) Polyester fibre needlefelt, polyester scrim supported, high density heavy duty needed 500 grams per metre², heat set, and laser cut to required size. This product is the preferred textile surface for brand message printing, offering print clarity and colour fastness to I.S.O.,

- b) Tufted polyester cut pile surface with a pile height of 5-6 mm, pile weight of 600-620 grams per metre², knife cut to required size. This surface is suitable for brand message printing, colour fast to I.S.O., British and Australian standards.
- c) Tufted nylon cut pile surface, with a pile height of 5-6 mm, pile weight of 600 grams per metre², which can be knife cut to required size. This surface is suitable for acid dye for solid plain colours, which are colour fast to I.S.O., British and Australian standards.

Manufacturing Process

Selected textile surface is laser cut in the case of needlefelt material, or knife cut in case of tufted polyester or nylon surface material to the required blank shape and size, generally 250 x 900 mm, but not limited to this size. The blanks are stored on a holding table behind the rubber process line for the operator to lay up.

Uncured nitrile rubber is cut into required length strips from a continuous roll as received from the rubber supplier. The nitrile rubber strips are laid in parallel across the width of a TeflonTM continuous carrier belt on the rubber process line. The selected textile blank and the primary support layer are laid in position onto the uncured nitrile rubber to allow for a minimum of a 2 cm border of the rubber to be visible on either side of the textile blank. Product identification labels are positioned beneath the rubber on the TeflonTM belt to be cured to the back of each product.

The layed up batch of uncured nitrile rubber and textile blanks are advanced on the belt into the heat zone of the press over a heated platen. A press head is activated to compress the layed up materials to the heated platen for a selected time duration, pressure and temperature settings to cure and bond the nitrile rubber backing to the primary carrier

the textile material are 170° for three minutes at 75 pounds per square inch. Following the selected time duration the press head raises, and releases the cured materials, for the belt drive to advance clear of the heated platen area, drawing in the following uncured layed up materials for the cure process to recur. This process is repeated continuously for each layed up batch of materials.

Once the materials are clear of the heat press they are cooled, taken from the carrier belt and stacked to be edge trimmed by a guillotine operator. Following the trim process the bar runner product in its finished blank form is passed to a textile sublimation printer where the end finish requires a printed design on the product. In the case of a plain dyed colour finish, the product is passed to the dye house to be vat dyed.

Sublimation Print Process

A computer generated design is output with film colour separations, to be exposed on screens, which in turn are used to screen print sublimation dyes of the design onto transfer print papers for volume repeat prints. Short run and strike off print designs are output from the design computer to a digital image printer employing sublimation dyes for exact image transfer.

The finished nitrile rubber blank table or counter mat are placed on the bed of the sublimation print machine, a screen printed or digital image print paper which carries the required design, is placed on the textile surface of the table or counter mat blank, dye face down. A heat platen is activated pressing the print paper to the textile surface under a selected heat, pressure and time duration. This process sublimates the dye turning it into a gas which is transferred into the textile fibre, resulting in a mirror image of the screen-print

On release from the press, the spent print paper is removed, leaving the finished design to be cooled and stored for packing and dispatch.


The above descriptions are of preferred embodiments of the invention and are provided as illustration and not limitation of the invention. Clearly persons skilled in the art
5 would understand variations of the described invention without any inventive step and these are included within the scope of the invention as defined in the claims.

CLAIMS DEFINING THE INVENTION:

1. A table or counter mat having a composite sheet structure comprising a non-slip backing layer formed from rubber; a top liquid absorbent textile surface for resting cups, mugs or glasses; and an intermediate stabilisation layer joining the backing layer to the textile surface wherein the resultant mat is absorbent and readily able to be laundered.
2. A table or counter mat according to claim 1 wherein the non-slip backing layer is formed from a nitrile rubber and wherein the textile surface includes a textile marking providing a colouring or a print or advertising message viewable from above.
3. A table or counter mat according to claim 1 or 2 wherein the nitrile rubber is in the range of less than 2 mm thick with a density of about 1000 grams per square metre; and wherein the intermediate stabilisation layer comprises a heat curable non-woven polyester material curable at temperatures greater than 100°C and preferably at about 170°C with the non-woven polyester having a density of about 450 to 650 grams per square metre and the textile marking is formed by a sublimation textile printing process which occurs at greater than 100°C and preferably greater than 170°C; whereby the mat is able to be laundered in hot water.

1/2

FIG. 1

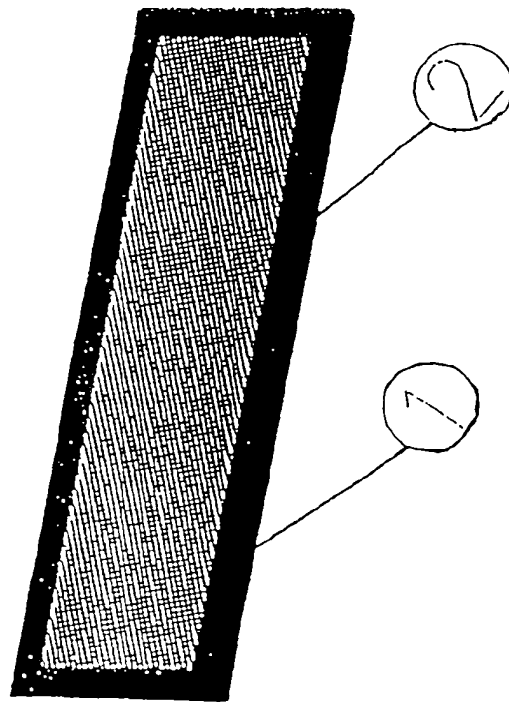

2/2

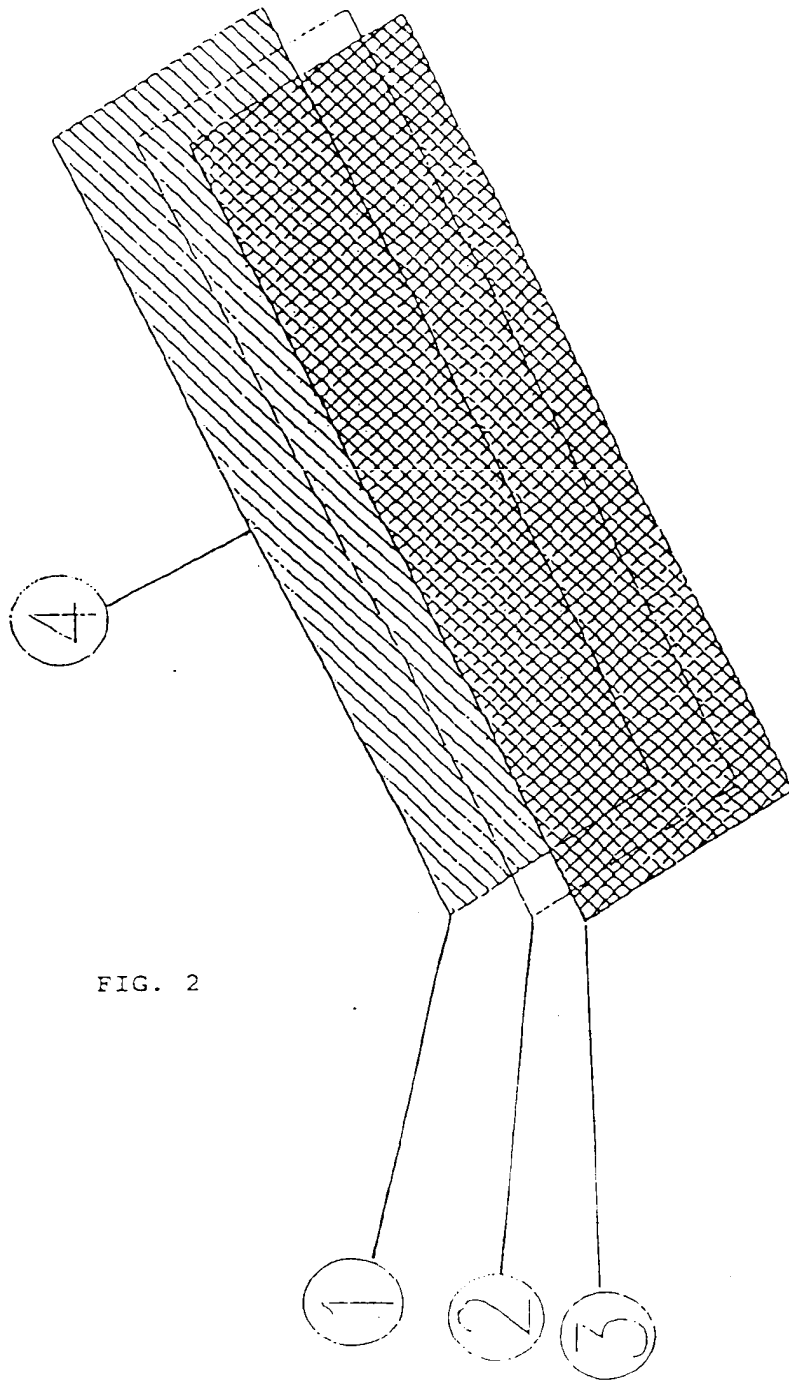


FIG. 2